

## Spur gear winch TL150


# Spur gear winch



#### Product specifications:

- robust and safe hoisting winch
- static safety factor 4
- load pressure brack with double ratchet system
- maintenance free bearing
- cable outlet left or right
- adjustable crank with ergonomic grip
- in compliance with EN13157, DIN 15020 and EX types ATEX 114 (94/9/EG)
- paint thickness is 60 - 80 micron in 1 layer and in compliance with DIN/ISO 12944, C1M

#### Options:

- zinc-plated finish (6 - 8 micron)
- ATEX certified  II 3 GD T3, zone 2 and 22

#### Accessories:

- steel or stainless steel wire ropes
- pulley blocks suitable for hand winches




**GEBUWIN**  
metal products

Industrieweg 6, 7102 DZ Winterswijk, The Netherlands  
Telephone: +31(0)543 532600 Email: [info@gebuwin.com](mailto:info@gebuwin.com)  
For more information: [www.gebuwin.com](http://www.gebuwin.com)



## Technical specifications TL150

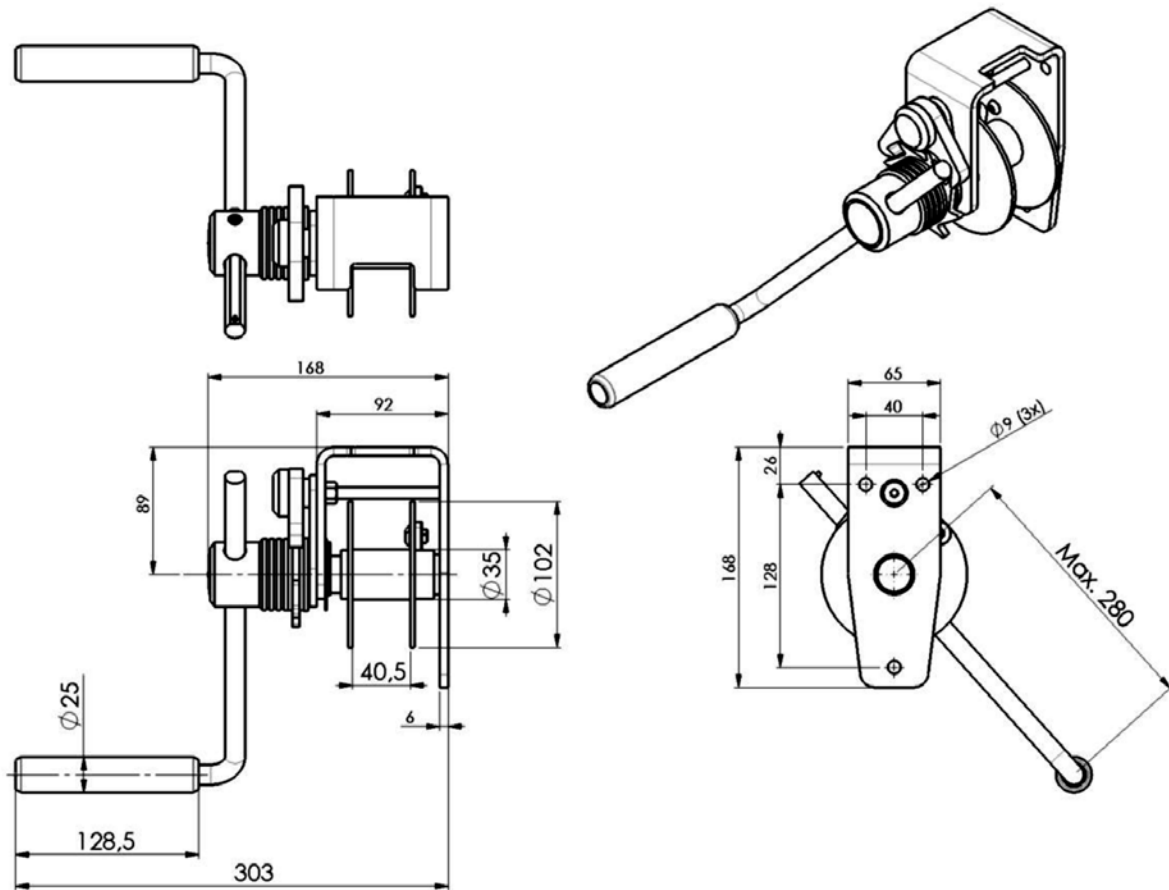

Type	Mounting	Material finish	Remarks
TL150 GR	Wall, 3x M8 class 8.8	Painted finish	RAL 7035 (grey)
TL150 EV	Wall, 3x M8 class 8.8	Zinc-plated finish	

Technical specifications			TL150
Capacity 1st cable layer	kg		150
Capacity last cable layer	kg		68
Crankforce 1st cable layer	daN		11
Hoisting length one rotation, 1st layer	mm		122
Max. cable storage (one cable drum)	m		13
Diameter cable	mm		4
Min. breaking load cable	kN		4,5
Own weight	kg		4

subject to changes

Form more information: [www.gebuwin.com](http://www.gebuwin.com)